




**VFUL60**

**Wire cable tray**

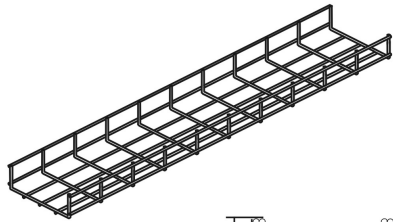

Screen: 50 x 100 mm  
 Cross-wire: Ø 3.50 mm  
 Lengthwise wire: Ø 4.50 mm

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating

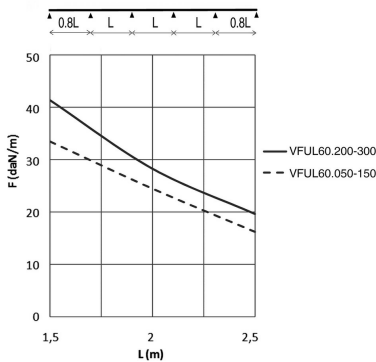


HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m	📦	Stock	Unit
HD	VFUL60.050	60	50		3000	0,57	30	v	M
HD	VFUL60.100	60	96		3000	0,83	30	v	M
HD	VFUL60.150	60	146		3000	0,87	30	v	M
HD	VFUL60.200	60	197		3000	1,03	30	v	M
HD	VFUL60.300	60	297		3000	1,33	30	v	M
-	ZAVFUL60.050	60	50		3000	0,57	30		M
-	ZAVFUL60.100	60	96		3000	0,83	30		M
-	ZAVFUL60.150	60	146		3000	0,87	30		M
-	ZAVFUL60.200	60	197		3000	1,03	30		M
-	ZAVFUL60.300	60	297		3000	1,33	30		M

Fix with:



Support joiner for VFU(L) VFKS  
 Snap-on joiner for VFU(L) KPVF



Joining clamp VFK

**LOAD DIAGRAM**

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)  
 L = support distance (m)  
 Max. deflection (m) = L/100

**NEW**

Our VFUL60 wire cable tray is now available in zinc aluminium (ZA). This coating lasts 3 times longer than zinc alone and provides a smoother and more balanced surface than zinc, even after deformation.